

TRIODE PENTODE

PCL83

Combined triode and output pentode with separate cathodes for use in television receivers with the triode as a frame blocking oscillator and the pentode as a frame output valve.

HEATER

Suitable for series operation a.c. or d.c.

I_h	300	mA
V_h	12.6	V

MOUNTING POSITION

Any

CAPACITANCES (measured without an external shield)

C_{at-gp}	<0.1	pF
C_{at-ap}	<1.6	pF
C_{gt-gp}	<0.03	pF
C_{gt-ap}	<0.05	pF

Pentode Section

C_{a-g1}	<0.2	pF
C_{in}	5.7	pF
C_{out}	4.7	pF
C_{g1-h}	0.4	pF

Triode Section

C_{a-g}	1.6	pF
C_{a-k+h}	0.35	pF
C_{g-k+h}	2.0	pF
C_{g-h}	0.1	pF

CHARACTERISTICS

Pentode Section

V_a	170	V
V_{g2}	170	V
I_a	30	mA
I_{g2}	5.0	mA
V_{g1}	-9.5	V
g_m	5.5	mA/V
r_a	53	k Ω
μ_{g1-g2}	10	

Triode Section

V_a	250	V
I_a	10.5	mA
V_g	-8.5	V
g_m	2.2	mA/V
r_a	7.7	k Ω
μ	17	

PCL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes for use in television receivers with the triode as a frame blocking oscillator and the pentode as a frame output valve.

PENTODE SECTION AS FRAME OUTPUT VALVE

Circuit design

To allow for valve spread and deterioration during life the frame output circuit should be designed around the following values.

V_a	70	70	V
V_{g2}	170	200	V
$i_{a(pk)}$	54	64	mA

For an average new valve the following figures will apply.

V_a	70	70	V
V_{g2}	170	200	V
$i_{a(pk)}$	81	96	mA

PENTODE SECTION AS AUDIO OUTPUT VALVE

Single Valve Class 'A'

V_a	170	200	V
V_{g2}	170	200	V
V_{g1}	-9.5	-13	V
$I_{a(o)}$	30	27	mA
$I_{g2(o)}$	4.8	4.4	mA
R_a	5.5	7.5	k Ω
$V_{in(r.m.s.)}$	5.0	5.2	V
P_{out}	2.2	2.5	W
D_{tot}	10	10.5	%

Two Valves in Class 'AB' Push-Pull

V_a	170	200	V
V_{g2}	170	200	V
R_k	180	220	Ω
$I_{a(o)}$	2 × 24	2 × 25	mA
I_a (max. sig.)	2 × 27.5	2 × 29	mA
$I_{g2(o)}$	2 × 3.8	2 × 3.9	mA
I_{g2} (max. sig.)	2 × 6.25	2 × 8.5	mA
R_{a-a}	6.5	7.5	k Ω
$V_{in(g1-g1)} r.m.s.$	17	23.5	V
P_{out}	5.0	7.2	W
D_{tot}	3.6	4.2	%

TRIODE SECTION AS A.F. VOLTAGE AMPLIFIER

V_b (V)	R_a (k Ω)	I_a (mA)	R_k (k Ω)	$\frac{V_{out}}{V_{in}}$	V_{out} (V r.m.s.)	R_{g1}^* (k Ω)
170	100	1.07	2.7	14	21	330
200	100	1.17	3.3	13.5	26.5	330

$\frac{V_{out}}{V_{in}}$ measured with an input voltage of 100mV

V_{out} measured for a total harmonic distortion of 5%

*Grid resistor of following valve.

TRIODE PENTODE

PCL83

Combined triode and output pentode with separate cathodes for use in television receivers with the triode as a frame blocking oscillator and the pentode as a frame output valve.

LIMITING VALUES

Pentode Section




$V_{a(b)}$ max.	550	V
V_a max.	250	V
$+V_{a(pk)}$ max.	2.0	kV
$-V_{a(pk)}$ max.	500	V
p_a max.	5.4	W
$V_{g2(b)}$ max.	550	V
V_{g2} max.	250	V
p_{g2} max.	1.2	W
p_{g2} max. (speech and music)	2.4	W
I_k max.	45	mA
R_{g1-k} max. (self bias)	500	k Ω
R_{g1-k} max. (fixed bias)	250	k Ω
R_{g1-k} max. (timebase operation)	2.2	M Ω
V_{h-k} max. (d.c. heater negative with respect to cathode or a.c.r.m.s.)	250	V
V_{h-k} max. (d.c. heater positive with respect to cathode)	150	V

Triode Section

$V_{a(b)}$ max.	550	V
V_a max.	250	V
p_a max.	3.5	W
I_k max.	20	mA
$*I_{k(pk)}$ max.	250	mA
$-V_{g1(pk)}$ max.	350	V
R_{g1-k} max.	1.0	M Ω
V_{h-k} max. (d.c. heater negative with respect to cathode or a.c.r.m.s.)	250	V
V_{h-k} max. (d.c. heater positive with respect to cathode)	150	V

*Max. pulse duration 400 μ sec.


2224



PCL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes for use in television receivers with the triode as a frame blocking oscillator and the pentode as a frame output valve.

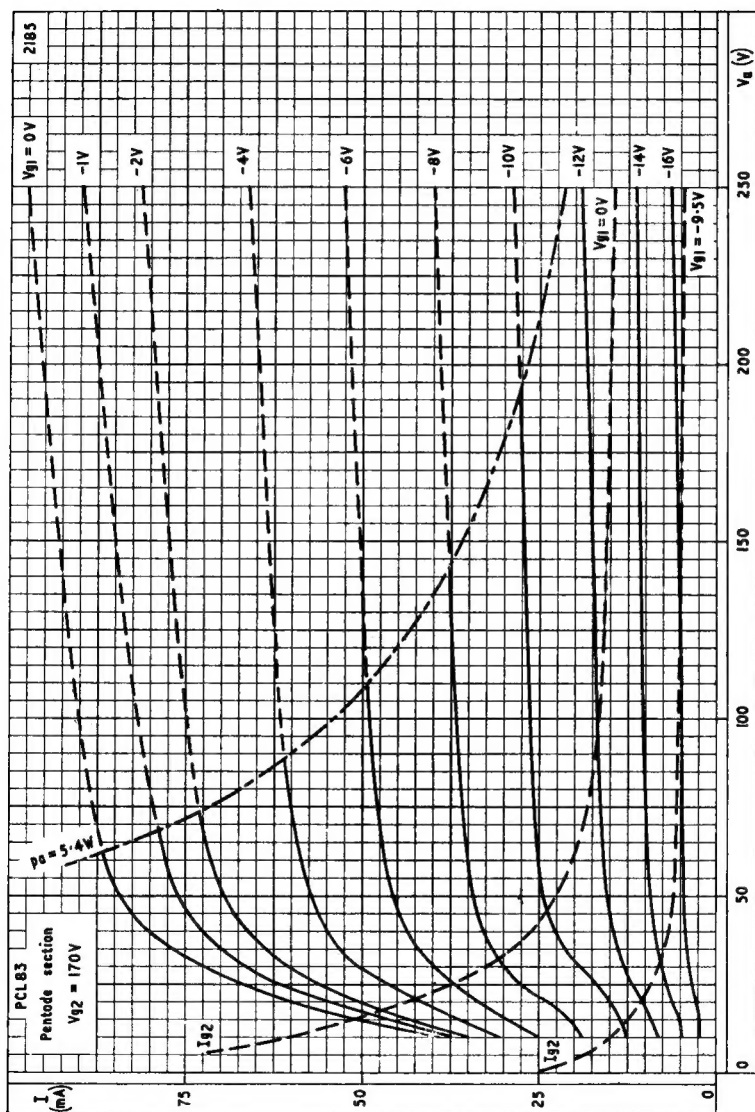

ANODE AND SCREEN-GRID CURRENTS PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER. $V_{g2} = 170V$